


FIBRANprofiles GUIDE

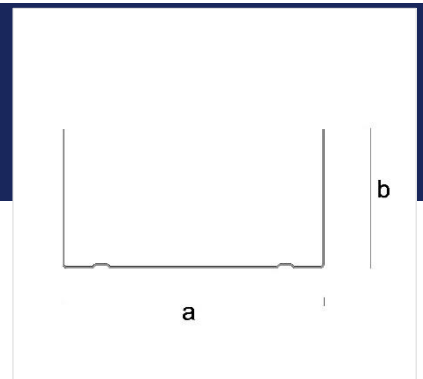

Product Description

FIBRANprofiles U channel are cold roll formed from galvanized steel DX51D+Z for use in non-load-bearing partition system according to EN 10327.

FIBRANprofiles U channel are preformed for fixing it at floor and ceiling.

CE marking according to EN14195.

Applications

Suitable for non-load-bearing partition systems and linings

Features	U. M.	Value	Standard
Reaction to fire	Class	A1	EN 14195
Gage	mm	0,6	EN 10143
Protective coating	-	Z140	EN 10327

Type	a [mm]	b [mm]	Length [mm]	CE
Guida 50	50	40	3000-4000	U40/50/40
Guida 75	75	40	3000-4000	U40/75/40
Guida 100	100	40	3000-4000	U40/100/40
Guida 150	150	40	3000-4000	U40/150/40

Material available in thickness 8/10 e 10/10mm with flange of 80 and 100mm.

FIBRAN reserves the right to alter or amend product specifications without notice. The information included in this publication is correct to the best of our knowledge at the time of printing. Whilst FIBRAN will endeavor to ensure publications are up to date, it is the user's responsibility to check with the company the validity of the information prior to materials' use. For more information visit the web site www.fibran.it.

Date 31/07/2018

FIBRAN S.p.A. via Fiasella 5/11 16121 GENOVA Italy - ph. +39 010 25466.1 fax +39 010 25466.949 - www.fibran.it - tech@fibran.it