


Partition FIBRAN SUPER 80/50 mw

Partition drywall $R_w = 47$ dB - thickness 80 mm

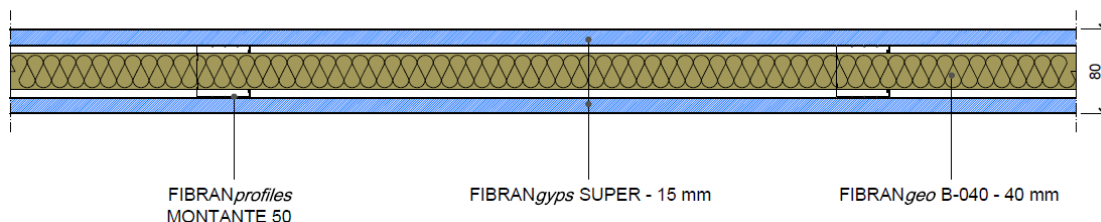

COMPONENTS

Plasterboards

1 layer of **FIBRANGyps SUPER** both side, thickness **15 mm**, CE marked– **type D, I, F, H1, R** according to EN 520, classified **A+** according to EN ISO 16000-09, fire reaction **A2-s1, d0** according to EN 13501-1, controlled density more than 1000 kg/m³, enhanced surface hardness, improved core adhesion at high temperature, reduced water absorption rate (total <5% ; surface 180 g/m²), higher strength (flexural breaking load > 725 N), weight 15,5 kg/m², water vapor resistance factor $\mu=10$, thermal conductivity $\lambda=0,25$ W/m K and specific heat $c_p=1,03$ kJ/kg K according to EN 10456

Metal frame thickness 0,6 mm conform to EN 14195

Channels **FIBRANprofiles GUIDA 50** mechanically fixed to the floor and ceiling using fixing nails at a maximum spacing of 500 mm;

Studs **FIBRANprofiles MONTANTE 50**, max axial spacing every 600 mm, slotted to allow passage of the installations

Insulation board in cavity

FIBRANGeo B-040, biosoluble stone wool board, density **40 kg/m³**, thickness **40 mm**, fire reaction A1 according to EN 13501-1, thermal conductivity 10°C $\lambda_D = 0,034$ W/m K according to EN 12667 and EN 12939, water vapour diffusion resistance factor $\mu= 1$ according to EN 12086, specific heat capacity $c_p=1,03$ kJ / kg K according to EN 10456

Screws

Self-drilling screws **FIBRANGyps SCREW SUPER 3,9 x 38 mm** fixed max 150 mm each


Adhesive tape and joint filler

Closed cell polyethylene foam adhesive tape **FIBRANGyps** to be applied on the entire perimeter of the metal structure, to eliminate the possible acoustic bridges due to the transmission of noise through the building structures.

Treatment of the joints between plasterboards and on the head of screws with **FIBRANGyps JF**, CE marked 3B according to EN 13963, and reinforcing tape **FIBRANGyps TAPE** according to the level quality Q2 UNI 11424

Partition FIBRAN SUPER 80/50 mw

Technical features

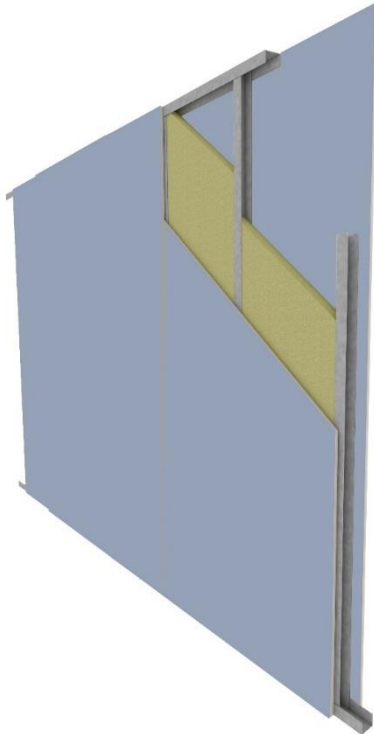

Acoustics

Rw = 47 dB – test report Istituto Giordano n° 337573

Thermal Insulation

U = 0,77 W/m²K – calculated with software

Mechanical performance

FIBRANprofiles channels and studs DIN 50 mm, max axial spacing every 600 mm, thickness 6/10 mm conform to EN 14195. Profiles must be designed according to local regulation and specific application.

In case of walls longer than 15 meters, an expansion joint must be made every 10 meters or at structural joints

Finishing

According to quality level required (Eurogypsum). Use FIBRANgyps JF READY MIX for level Q4




Sustainability

FIBRANgyps plasterboards are classified A+, the best one according to EN ISO 16000-09, with regards to the emission of formaldehyde, acetaldehyde and other substances.

FLEXURAL BREAKING LOAD

	FIBRANgyps A13	FIBRANgyps SUPER 13	FIBRANgyps A15	FIBRANgyps SUPER 15
Longitudinal flexion EN 520	> 550 N	> 725 N	> 650 N	> 870 N
Transversal flexion EN 520	> 210 N	> 300 N	> 250 N	> 360 N

RESISTANCE TO LOADS*

	1 layer FIBRANgyps SUPER 13		2 layers FIBRANgyps SUPER 13		2 layers FIBRANgyps SUPER 13	
	Shear strength (kg)		Shear strength (kg)		Traction (kg)	
FIXINGS	Laboratory values	Recommended values	Laboratory values	Recommended values	Laboratory values	Recommended values
Nail 	36	14	-	-	-	-
Metallic dowel "Gold" 	-	-	80	32	60	24
Metallic dowel "Molly" 	120	48	180	72	150	60

ECCENTRIC LOADS RESISTANCE *


		<p>Loading test on shelf</p> <p>Shelves loaded up to 48 kg can be fixed directly to double layer of FIBRANgyps SUPER, using metallic dowels Molly at maximum distance of 50 cm. The result of the laboratory test is 120 kg.</p>	48kg
---	---	---	-------------

* Recommended values obtained by applying to the test values a safety coefficient of 2.5 (as required by UNI 13964).


Test report n°137 by Tecnolab di Napoli and test reports n°327335/n°3273336 by Istituto Giordano of Bellaria.

Partition FIBRAN SUPER 80/50 mw


Construction details

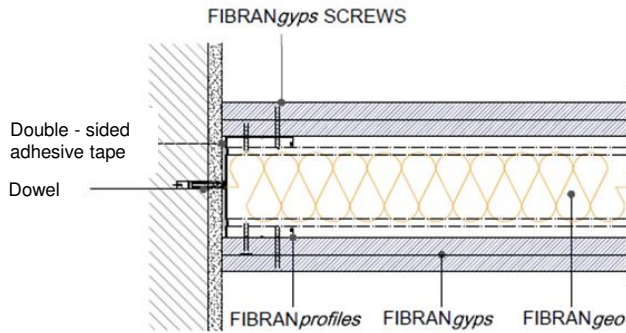


Detail. 1 WALL CONNECTION

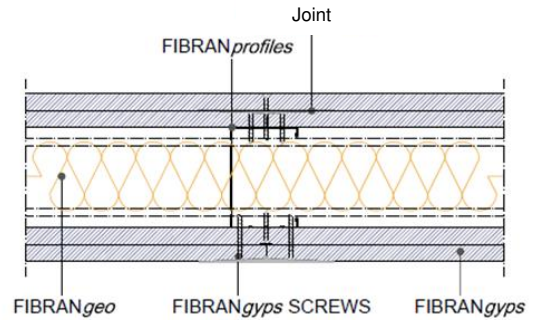

Detail. 2 JOINT

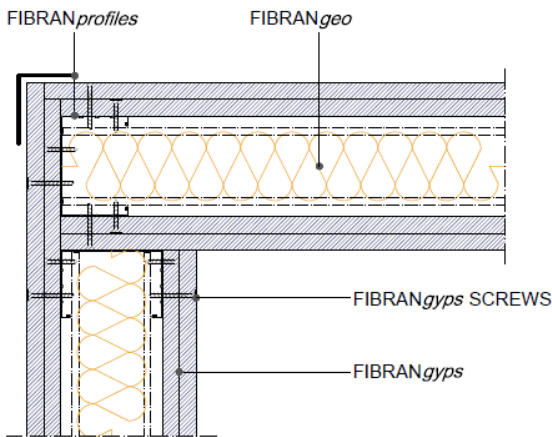


Detail. 3 CORNER FITTING

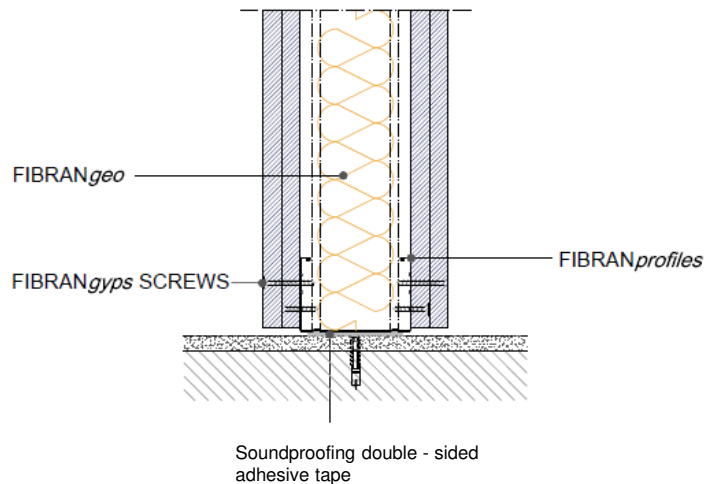


Detail. 4 FLOOR CONNECTION

Partition FIBRAN SUPER 80/50 mw


Construction details

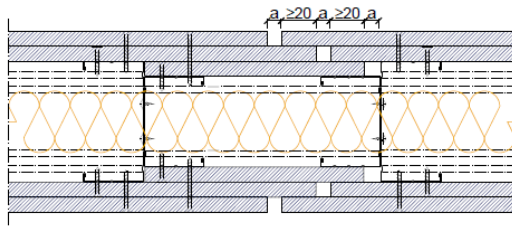

Detail. 5 **EXPANSION JOINT**

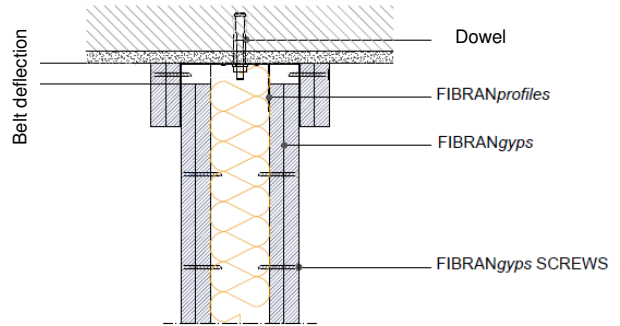

Detail. 6 **DESOLIDARIZZAZIONE FLOOR - WALL**

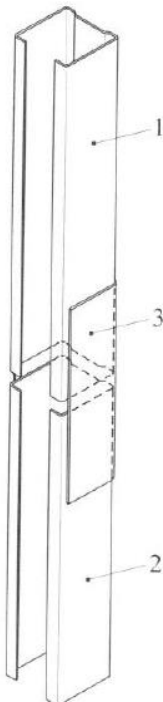

N.B. Indicative drawings

LEGEND

- 1. stud
- 2. stud
- 3. stiffening element made with a channel of the same width as the stud; length at least 10 times the width

Detail. 7 **JOINT BETWEEN PROFILES**

Partition FIBRAN SUPER 80/50 mw

Quantities of material

Indicative quantities for square meter of partition

		quantity/m ²		quantity/m ²	
		centre 600 mm		centre 400 mm	
Description	UM				
FIBRANgyps	m ²	2,1	2,1	2,1	2,1
FIBRANprofiles studs	m	2	4	2,6	5,2
FIBRANprofiles channels	m	0,7	0,7	0,7	0,7
FIBRANgeo	m ²	1,05	1,05	1,05	1,05
Joint filler FIBRANgyps JF	kg	0,7	0,7	0,7	0,7
Adhesive tape FIBRANprofiles	m	1	1	1	1
FIBRANgyps TAPE	m	1,67	1,67	1,67	1,67
FIBRANgyps SCREW SUPER 38mm	pz	25	25	30	30